

CCTPlus

24VDC Flexible LED Strip
Tunable White Series



Warm White

Cool White

CCTPlus

24VDC Flexible LED Strip Tunable White Series




Features

- Tunable White 2700K + 6500K
- 3W Max per foot with the Cyan Controller (6W total for two channels)
- Up to 300Lm per foot
- Cuttable every 3.93in (100mm)
- UL Listed Class 2 Certified
- 90+ CRI (White LED's)
- 6-Year warranty



Specifications

Color Temperatures:




Dimensions

Dimensions	Length
Total Length	16.4 ft (5000mm)
Cut Length	3.93 Inch (100mm)
Width	0.39 Inch (10mm)
Height	0.083 Inch (2.1mm)
Input Cable Length	8 Inch (200mm)

Control Options

Part Number	Description
STCV-B-100W-C-TW	Cyan 24VDC Tunable White LED Controller

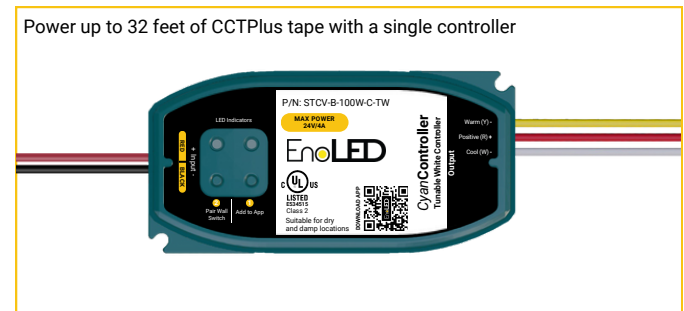

Specifications	Description
Ordering Code:	CCTPlus-16
Input Voltage:	24VDC
Color Temperature:	CCT Tunable (2700K + 6500K)
CRI:	90+ Ra
Power:	3W/ft (6W/ft for two channels)
Lumens:	300Lm/ft
Cut Length:	3.93 Inch (100mm)
Environment:	IP20 (non-waterproof)
Dimensions (W x H x L):	0.39" x 0.083" x 196.85"
Maximum Run:	32 ft (9700mm)
Beam Angle:	120°
Lamp Life:	50,000 hours
Max Ambient Temperature:	113°F
Adhesive:	3M

CCTPlus


24VDC Flexible LED Strip Tunable White Series



Photometric and Power Data

LED Channel	Voltage	Watts/ft	Lumens/ft	CCT	CRI	Wavelength
Warm White	24.0	3	300	2700K	90	-
Cool White	24.0	3	300	6500K	90	-

Wiring Diagram

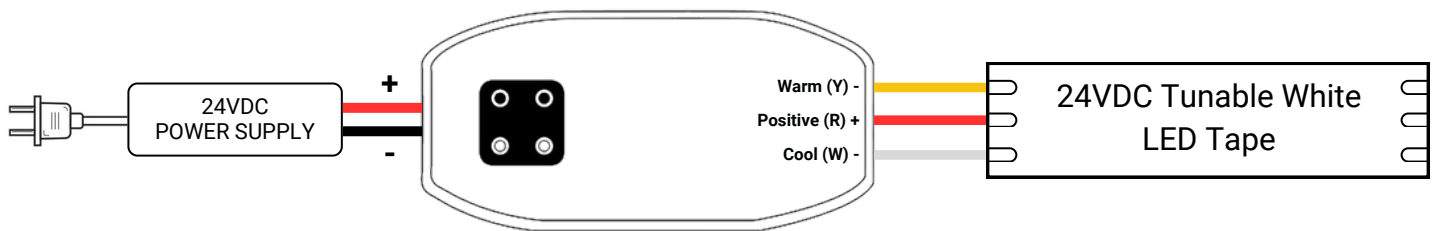

CCTPlus

24VDC Flexible LED Strip Tunable White Series



Channel Compatibility

Surface Mount



SL-103-S-94
Aluminium Finish
 Width (outside): 0.59" (14.90mm)
 Width (inside): 0.50" (12.70mm)
 Height: 0.27" (6.86mm)
 Length: 94" (2.38m)



SL-118-S-94
Aluminium Finish
 Width (outside): 0.66" (16.70mm)
 Width (inside): 0.48" (12.30mm)
 Height: 0.31" (8.00mm)
 Length: 94" (2.38m)



SL-118-B-94
Black Finish
 Width (outside): 0.66" (16.70mm)
 Width (inside): 0.48" (12.30mm)
 Height: 0.31" (8.00mm)
 Length: 94" (2.38m)




SL-118-BB-94
Black Finish
 Width (outside): 0.66" (16.70mm)
 Width (inside): 0.48" (12.30mm)
 Height: 0.31" (8.00mm)
 Length: 94" (2.38m)




SL-179-S-94
Aluminium Finish
 Width (outside): 0.66" (16.70mm)
 Width (inside): 0.48" (12.30mm)
 Height: 0.60" (15.30mm)
 Length: 94" (2.38m)



SL-179-B-94
Black Finish
 Width (outside): 0.66" (16.70mm)
 Width (inside): 0.48" (12.30mm)
 Height: 0.60" (15.30mm)
 Length: 94" (2.38m)



SL-430-S-94
Aluminium Finish
 Width (outside): 0.93" (23.50mm)
 Width (inside): 0.80" (20.30mm)
 Height: 0.50" (12.80mm)
 Length: 94" (2.38m)



SL-454-S-94
Aluminium Finish
 Width (outside): 0.93" (23.50mm)
 Width (inside): 0.80" (20.30mm)
 Height: 0.39" (12.80mm)
 Length: 94" (2.38m)




SL-314-S-94
Aluminium Finish
 Width (outside): 0.80" (20.30mm)
 Width (inside): 0.68" (17.50mm)
 Height: 0.80" (20.30mm)
 Length: 94" (2.38m)




SL-331-S-94
Aluminium Finish
 Width (outside): 1.14" (29.00mm)
 Width (inside): 0.68" (17.50mm)
 Height: 0.88" (22.35mm)
 Length: 0.94" (2.44mm)




SL-504-S-94
Aluminium Finish
 Width (outside): 1.31" (33.20mm)
 Width (inside): 1.18" (30.00mm)
 Height: 0.57" (14.40mm)
 Length: 94" (2.38m)




SL-910-S-94
Aluminium Finish
 Width (outside): 1.44" (36.70mm)
 Width (inside): 1.18" (30.00mm)
 Height: 1.44" (36.70mm)
 Length: 94" (2.38m)



SL-910-B-94
Black Finish
 Width (outside): 1.44" (36.70mm)
 Width (inside): 1.18" (30.00mm)
 Height: 1.44" (36.70mm)
 Length: 94" (2.38m)



SL-928-S-94
Aluminium Finish
 Width (outside): 1.97" (50.00mm)
 Width (inside): 1.80" (45.72mm)
 Height: 1.16" (29.50mm)
 Length: 94" (2.38m)



SL-928-B-94
Black Finish
 Width (outside): 1.97" (50.00mm)
 Width (inside): 1.80" (45.72mm)
 Height: 1.16" (29.50mm)
 Length: 94" (2.38m)

Corner LED Channel




SL-214-S-94
Aluminium Finish
 Width (outside): 0.64" (16.30mm)
 Width (inside): 0.44" (11.00mm)
 Height: 0.64" (16.30mm)
 Length: 94" (2.38m)



SL-267-S-94
Aluminium Finish
 Width (outside): 0.69" (17.70mm)
 Width (inside): 0.47" (12.10mm)
 Height: 0.69" (17.70mm)
 Length: 94" (2.38m)

Recessed Mount



RL-601-S-94
Aluminium Finish
 Width (outside): 0.91" (23.00mm)
 Width (inside): 0.48" (12.30mm)
 Height: 0.31" (8.00mm)
 Length: 94" (2.38m)




RL-615-S-94
Aluminium Finish
 Width (outside): 0.91" (23.00mm)
 Width (inside): 0.48" (12.30mm)
 Height: 0.57" (14.50mm)
 Length: 94" (2.38m)




RL-727-S-94
Aluminium Finish
 Width (outside): 1.20" (30.60mm)
 Width (inside): 0.80" (20.30mm)
 Height: 0.50" (12.80mm)
 Length: 94" (2.38m)



RL-778-S-94
Aluminium Finish
 Width (outside): 1.31" (33.20mm)
 Width (inside): 1.18" (30.00mm)
 Height: 0.57" (14.40mm)
 Length: 94" (2.38m)



RL-809-S-94
Aluminium Finish
 Width (outside): 1.43" (36.30mm)
 Width (inside): 1.30" (33.10mm)
 Height: 1.38" (35.00mm)
 Length: 94" (2.38m)



RL-851-S-94
Aluminium Finish
 Width (outside): 2.52" (64.00mm)
 Width (inside): 1.57" (40.00mm)
 Height: 1.16" (29.50mm)
 Length: 94" (2.38m)

Trimless Mud-In



TL-041-S-94
Aluminium Finish
 Width (outside): 0.93" (23.50mm)
 Width (inside): 0.80" (20.50mm)
 Height: 0.61" (15.50mm)
 Length: 94" (2.38m)



TL-066-S-94
Aluminium Finish
 Width (outside): 1.44" (36.70mm)
 Width (inside): 1.18" (30.00mm)
 Height: 0.61" (15.50mm)
 Length: 94" (2.38m)



TL-071-S-94
Aluminium Finish
 Width (outside): 1.97" (50.00mm)
 Width (inside): 1.77" (45.00mm)
 Height: 0.61" (15.50mm)
 Length: 94" (2.38m)