

# UniBasic COB

## 24VDC Performance and Value COB LED Tape Light



### Features

- Uniform illumination ideal for low-clearance areas
- 90+ CRI (color rendering index)
- 329 lumens per foot
- Dimming options: Incandescent, CLF, LED, MLV, ELV, 0-10V, dimmer switch / wireless app & wall switch
- Cuttable every 1.97" (50 mm)
- Red 3M VHB adhesive backing
- UL Listed Class 2 certified
- Available in 16ft and 100ft reels

### Specifications

|                            |                                                                                              |
|----------------------------|----------------------------------------------------------------------------------------------|
| <b>Input voltage:</b>      | 24VDC                                                                                        |
| <b>CRI:</b>                | 90+                                                                                          |
| <b>Power:</b>              | 3W/ft                                                                                        |
| <b>Lumens:</b>             | 329lm/ft                                                                                     |
| <b>Cut Length:</b>         | 1.97" (50 mm)                                                                                |
| <b>Environment:</b>        | IP20                                                                                         |
| <b>Dimensions (W x H):</b> | 0.39" x 0.05"                                                                                |
| <b>Beam Angle:</b>         | 180°                                                                                         |
| <b>Maximum run:</b>        | 32.8ft (98.4 Watts)                                                                          |
| <b>Lamp Life:</b>          | 50,000 Hours                                                                                 |
| <b>Operating Temp:</b>     | -4°F to 113°F (-20°C to 45°C)                                                                |
| <b>Adhesive:</b>           | 3M                                                                                           |
| <b>Warranty:</b>           | 6 years                                                                                      |
| <b>Dimming Control:</b>    | Incandescent • CFL/LED • MLV<br>ELV • 0-10V • Dimmer switch /<br>wireless app & wall switch. |

### Accessories (Included only with the 16ft tape)

#### Ordering Code

ENO-SC-TKIT-10

#### Description


1. 72" Wire to Tape screw connector  
0.39" (10mm)
2. Tape to Tape screw connector  
0.39" (10mm)



### Connectors and Wire

#### Ordering Code

|                  |                                                                 |
|------------------|-----------------------------------------------------------------|
| ENO-SC-TT-10     | 0.39" (10mm) Tape to tape screw connectors                      |
| ENO-SC-TW-10     | 0.39" (10mm) Tape to wire screw connectors                      |
| ENO-SC-LL-10     | 0.39" (10mm) L Shape 90° screw connectors                       |
| ENO-SC-TW-72W-10 | 0.39" (10mm) Tape to wire screw connectors with a 72" lead wire |
| WS-2P-15         | 2 Pin 15ft Wire Spool                                           |
| WS-2P-250        | 2 Pin 250ft Wire Spool                                          |

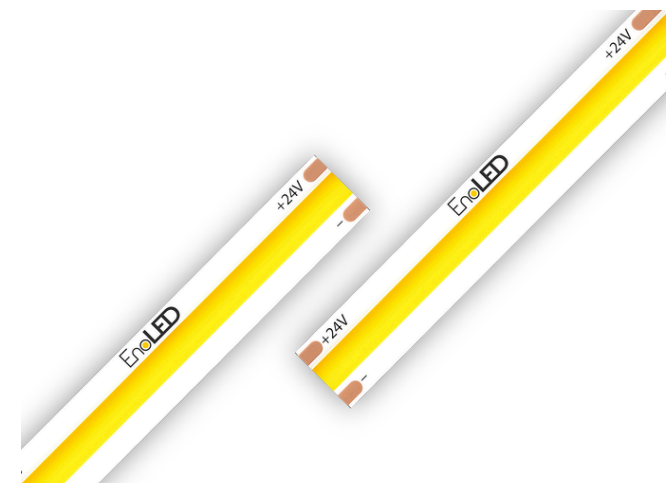

### Ordering Code Length

|                 |          |
|-----------------|----------|
| UniBasic-35-16  | 16.4 ft. |
| UniBasic-35-100 | 100 ft.  |

### Mechanical Diagrams

