


UniBasic COB

24VDC Performance and Value COB LED Tape Light



Features

- Uniform illumination ideal for low-clearance areas
- 90+ CRI (color rendering index)
- 347 lumens per foot
- Dimming options: Incandescent, CLF, LED, MLV, ELV, 0-10V, dimmer switch / wireless app & wall switch
- Cuttable every 1.97" (50 mm)
- Red 3M VHB adhesive backing
- UL Listed Class 2 certified
- Available in 16ft and 100ft reels

Specifications

Input voltage:	24VDC
CRI:	90+
Power:	3W/ft
Lumens:	347lm/ft
Cut Length:	1.97" (50 mm)
Environment:	IP20
Dimensions (W x H):	0.39" x 0.05"
Beam Angle:	180°
Maximum run:	32.8ft (98.4 Watts)
Lamp Life:	50,000 Hours
Operating Temp:	-4°F to 113°F (-20°C to 45°C)
Adhesive:	3M
Warranty:	6 years
Dimming Control:	Incandescent • CFL/LED • MLV ELV • 0-10V • Dimmer switch / wireless app & wall switch.

Accessories (Included only with the 16ft tape)

Ordering Code

ENO-SC-TKIT-10

Description


1. 72" Wire to Tape screw connector
0.39" (10mm)
2. Tape to Tape screw connector
0.39" (10mm)



Connectors and Wire

Ordering Code

ENO-SC-TT-10	0.39" (10mm) Tape to tape screw connectors
ENO-SC-TW-10	0.39" (10mm) Tape to wire screw connectors
ENO-SC-LL-10	0.39" (10mm) L Shape 90° screw connectors
ENO-SC-TW-72W-10	0.39" (10mm) Tape to wire screw connectors with a 72" lead wire
WS-2P-15	2 Pin 15ft Wire Spool
WS-2P-250	2 Pin 250ft Wire Spool

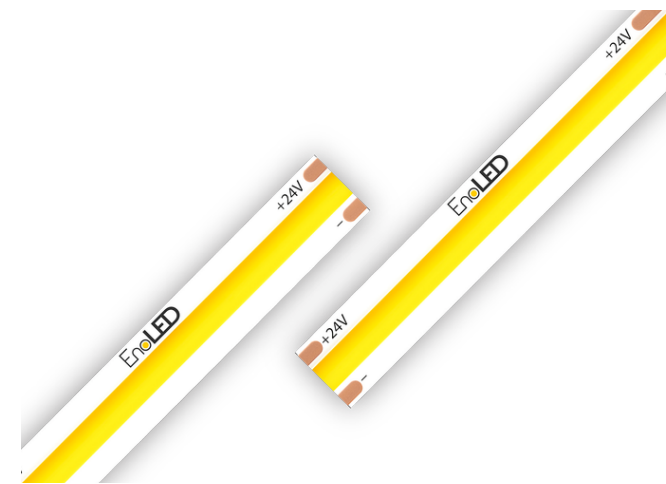

Ordering Code Length

UniBasic-40-16	16.4 ft.
UniBasic-40-100	100 ft.

Mechanical Diagrams

